

EU type examination certificate

EU-Baumusterprüfbescheinigung

CE-0085CP0214

Product Identification No.
Produkt-Identnummer

Field of Application <i>Anwendungsbereich</i>	EU Gas Appliances Regulation (EU/2016/426) <i>EU-Gasgeräteverordnung (EU/2016/426)</i>
Distributor <i>Vertreiber</i>	Türk Demirdöküm Fab. A.S. Bozüyük Tesi. 4 Eylül Mah., No: 245, TR-11300 Bozüyük - Bilecik
Product Category <i>Produktart</i>	Boilers with flue systems: Condensing water heater (3202)
Product Description <i>Produktbezeichnung</i>	condensing boiler
Model <i>Modell</i>	Maxi Condense ...
Countries of Destination <i>Bestimmungsländer</i>	AT, BE, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MT, NL, NO, PL, PT, RO, SE, SI, SK
Test Reports <i>Prüfberichte</i>	type testing: B 18/02/2595 EU from 20.03.2018 (DBI)
Test Basis <i>Prüfgrundlagen</i>	EU/2016/426 A III B (09.03.2016) DIN EN 15502-1 (01.10.2015) DIN EN 15502-2-1 (01.09.2017)
Validity / File no. <i>Gültigkeit / AZ</i>	21.04.2018 until 10.04.2028 / 18-0269-GEA


70028-04-A-DE

10.04.2018 Kö H-1/2

Date, Issued by, Sheet, Head of Certification Body
Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle

DVGW CERT GmbH is an accredited body by DAkkS according to DIN EN ISO/IEC 17065:2013 and notified by the government of the Federal Republic of Germany for certification of gas appliances under EU Regulation

DVGW CERT GmbH ist von der DAkkS nach DIN EN ISO/IEC 17065:2013 akkreditierte und von der Deutschen Bundesregierung benannte Stelle für die Zertifizierung von Gasgeräten gemäß EU-Verordnung EU/2016/426.

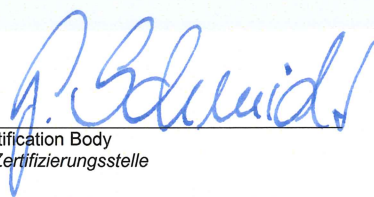


DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Appliance Categories <i>Geräte kategorien</i>	Supply Pressures <i>Versorgungsdrücke</i>	Countries of Destination <i>Bestimmungsländer</i>	Remarks <i>Bemerkungen</i>
I2E(S)	20/25 mbar	BE	
I3+	28-30/37 mbar	BE	
I3B/P	30 mbar	CY, IS, MT	
I12E+3+	20/25, 28-30/37 mbar	FR	
I12E3B/P	20, 37 mbar	PL	
I12E3P	20, 37 mbar	LU	
I12ELL3B/P	20, 50 mbar	DE	
I12ELwLs3P	20,20,13, 30 mbar	PL	
I12Esi3+	20/25, 28-30/37 mbar	FR	
I12Esi3B/P	20/25, 28-30 mbar	FR	
I12H3+	18, 28-30/37 mbar	ES	
I12H3+	20, 28-30/37 mbar	GB, GR, IE, SI, SK	
I12H3+	20, 30/37 mbar	IT, PT	
I12H3B/P	20, 30 mbar	DK, EE, FI, IE, LT, LV, NO, RO, SE, SI, SK	
I12H3B/P	20, 50 mbar	AT, CH, CZ, LU, SK	
I12H3B/P	25, 30 mbar	HU	
I12H3P	20, 37 mbar	SI, SK	
I12L3B/P	25, 30 mbar	NL	

Type <i>Typ</i>	Technical Data <i>Technische Daten</i>	Remarks <i>Bemerkungen</i>
Maxi Condense 110 B/C	nominal heat output: 19,2...95,3 kW heat input (Hi): 19,4...97,0 kW	
Maxi Condense 150 B/C	nominal heat output: 26,0...129,0 kW heat input (Hi): 26,2...131,0 kW	

Type Variation <i>Ausführungsvariante</i>	Explanations <i>Erläuterungen</i>
Maxi Condense ...	wall hanging appliance

Hints of Utilization /Remarks

Verwendungshinweise / Bemerkungen

Electrical data: 230 V AC, 50 Hz

additional countries of destination/ appliance categories: TK and BG: I12H3B/P: 20 mbar, 30 mbar

flue types: B23, B53, B53P, C13, C33, C53, C63 according to installation manual with flue system of Fa. Muelink & Grol (0432-BPR-220556), Centrotec (0036 CPD 9169 003) and Tecnocontrol S. A (0063-CPD7990/2)

DVG